

ETT-38246800 Series


(24VDC STANDARD)

OUTPUT POWER: 2.5W(APPROX)

WEIGHT:350~400g(APPROX)

Typical applications: Pan/Tilt camera, auto shutter, welding machines, water meter IC card, grill, oven, cleaning machine, garbage disposers, household appliances, slot machines, money detector, automatic actuator, coffee machine, towel disposal, lighting, coin refund devices, peristaltic pump.


MOTOR CHARACTERISTICS

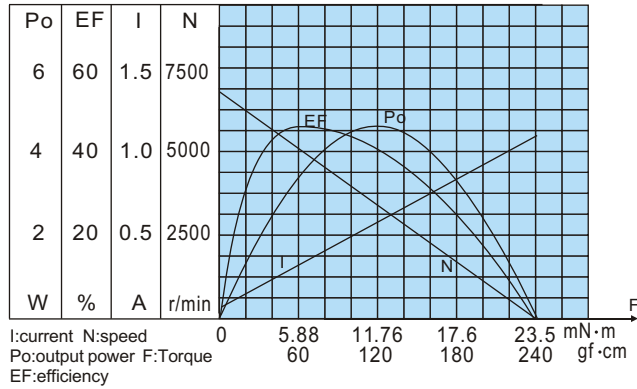

MOTOR TORQUE/SPEED/CURRENT

Rated voltage	24VDC
No load speed	6800r/min
No load current	45mA
Rated torque	60gf·cm 5.88mN·m
Rated current	280mA
Rated speed	5100r/min
Stall torque	240gf·cm 23.5mN·m
Stall current	1.1A

APPEARANCE SIZE

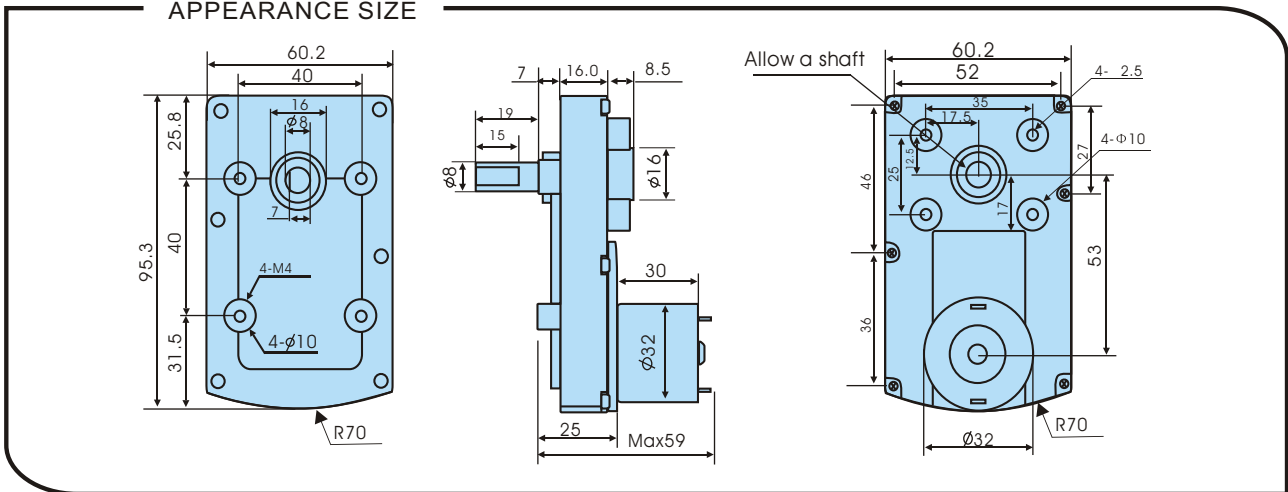

GEARED MOTOR TORQUE/SPEED/CURRENT

Geared motor name	Rated Volt. V	No load		Load torque				At maximum efficiency		Output power W	Number of gear trains
		Current mA	Speed r/min	Current mA	Speed r/min	Torque		Kg·cm	N·m		
						Kg·cm	N·m				
ETT-38246800-37K	24	≤45	189	≤280	137	1.62	0.16	6.0	0.59	2.2	3
ETT-38246800-67K	24	≤45	104	≤280	76	2.9	0.29	10	0.98	2.2	3
ETT-38246800-95K	24	≤45	73	≤280	54	4.2	0.41	12	1.18	2.2	3
ETT-38246800-151K	24	≤45	45	≤280	34	6.0	0.59	18	1.76	2.0	4
ETT-38246800-196K	24	≤45	34	≤280	26	7.8	0.76	24	2.35	2.0	4
ETT-38246800-277K	24	≤45	25	≤280	18.5	11.0	1.08	33	3.23	2.0	4
ETT-38246800-400K	24	≤45	17	≤280	13	15.8	1.55	48	4.70	2.0	4
ETT-38246800-680K	24	≤45	10	≤280	7.5	24.1	2.35	72	7.06	1.8	5
ETT-38246800-1166K	24	≤45	6	≤280	4.5	41.3	4.05	123	12.1	1.8	5
Packing Details	CTN size:55X35XH18CM 24pcs/CTN N.W. 10Kgs										