

ERF-395C DC MOTOR Series




Typical applications: TG-38(Φ37mm)、VFO (69.9X76.2mm)、PG-28(Φ28mm) planetary box.


MOTOR TORQUE/SPEED/CURRENT

MOTOR MODEL	Rated Vol. V	No load		At maximum efficiency				Stall	
		Current	Speed	Current	Speed	Torque	Power	Torque	Current
		mA	r/min	mA	r/min	g·cm	W	g·cm	mA
ERF-395CH-15140	24	≤ 60	7450	≤ 336	6420	90	5.8	650	2080
ERF-395CH-13160	24	≤ 60	6000	≤ 266	4910	77.3	4.07	420	1220
ERF-395PA-17115	24	≤ 70	7200	≤ 370	6200	100	6.2	705	2500
ERF-395PA-3082	12	≤ 150	7000	≤ 750	5885	97	5.85	609	3900


APPEARANCE SIZE

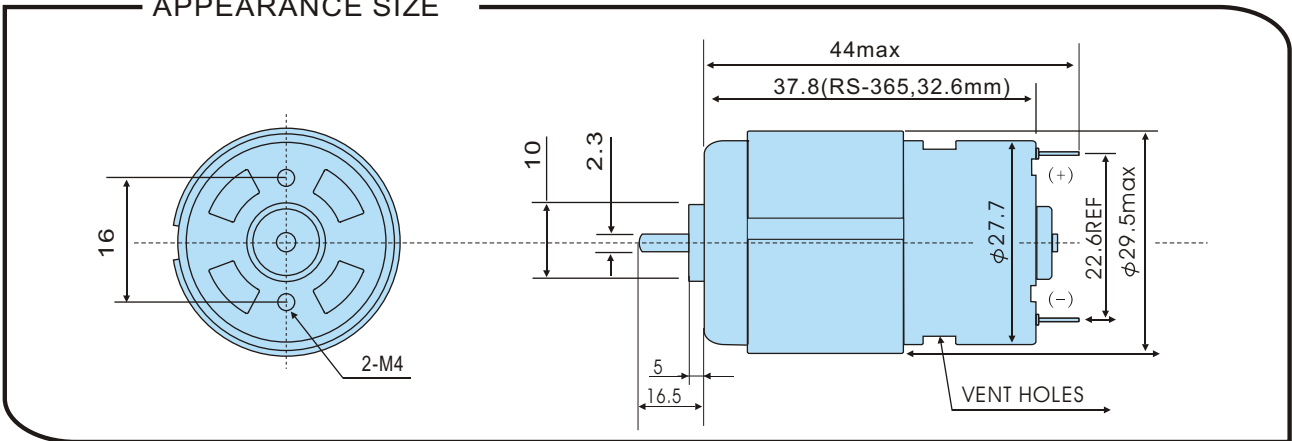


ERF-395CH-15140-24V CHARACTERISTICS

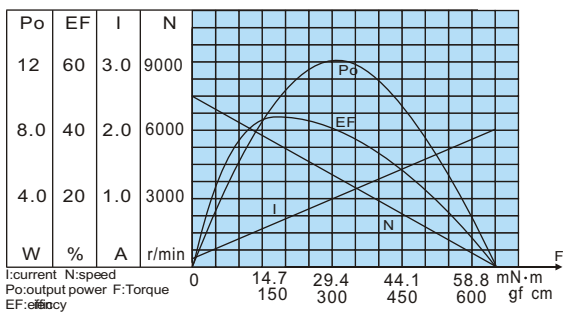

ERF-395CH-13160-24V CHARACTERISTICS

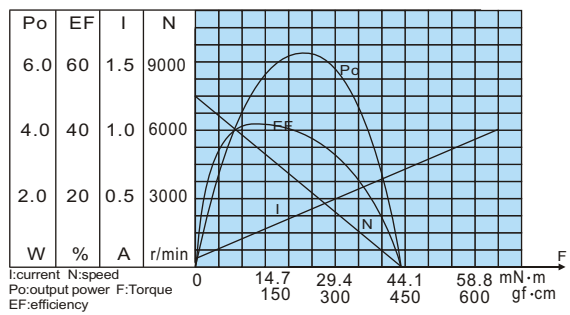

ERF-395CH-17115-24V CHARACTERISTICS

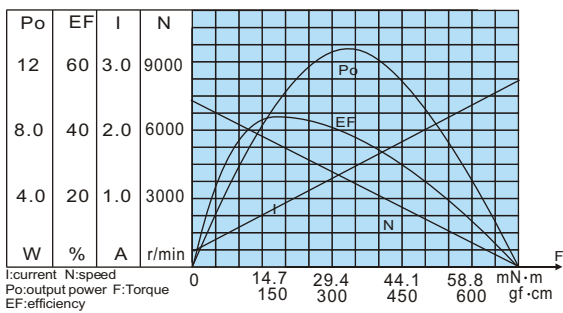

ERF-395CH-3082-12V CHARACTERISTICS

