

EGF 775245000 Series


(24VDC STANDARD)

OUTPUT POWER: 10~20W(APPROX)

WEIGHT:1000~1100g(APPROX)

Typical applications: Pan/TiltCamera, auto shutter, welding machines, water meter IC card, grill, oven, cleaning machine, garbage disposers, household appliances, slot machines, money detector, automatic actuator.


MOTOR CHARACTERISTICS

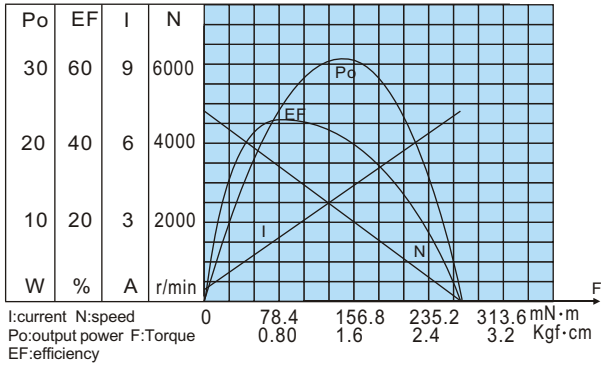

MOTOR TORQUE/SPEED/CURRENT

Rated voltage	24VDC
No load speed	5000r/min
No load current	250mA
Rated torque	650gf · cm 63.7mN · m
Rated current	2.0A
Rated speed	3750r/min
Stall torque	2700gf · cm 264.4mN · m
Stall current	7.0A

APPEARANCE SIZE

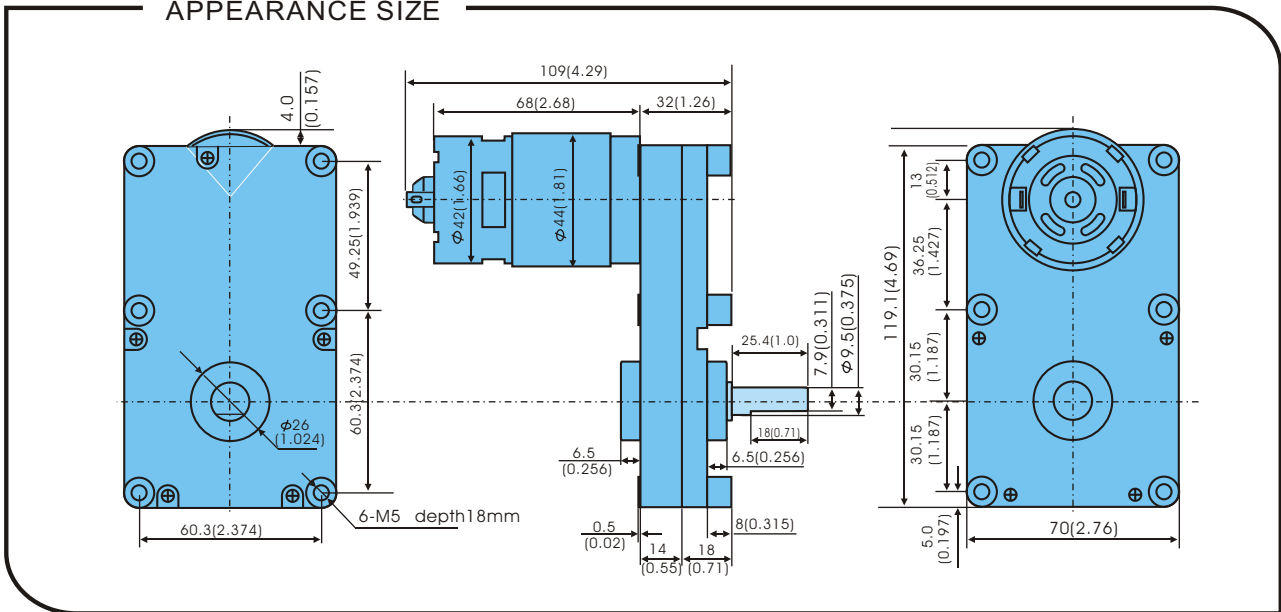

GEARED MOTOR TORQUE/SPEED/CURRENT

Geared motor name	Rated Volt. V	No load		Load torque				At maximum efficiency		Output power W	Number of gear trains
		Current mA	Speed r/min	Current A	Speed r/min	Torque		Kg·cm	N·m		
						Kg·cm	N·m				
EGF775245000-134K	24	≤300	37	≤2	28	63.5	6.22	190	18.6	17.8	3
EGF775245000-394K	24	≤300	12.7	≤2	9.5	169	16.6	500	49.0	16.1	4
EGF7751245000-494K	24	≤300	10	≤1.9	7.7	200	19.6	600	58.8	15.4	4
EGF775245000-664K	24	≤300	7.5	≤1.6	6.2	200	19.6	600	58.8	12.4	4
EGF775245000-863K	24	≤300	5.2	≤1.4	5.0	200	19.6	600	58.8	10.0	5
EGF775245000-2031K	24	≤300	2.5	≤0.6	2.3	200	19.6	600	58.8	4.6	5
Note	The other specifications can make as customers' request										
Packing Details	CTN size:31X30XH10CM 4pcs/CTN N.W. 7Kgs										